


CANTILEVER RACKING

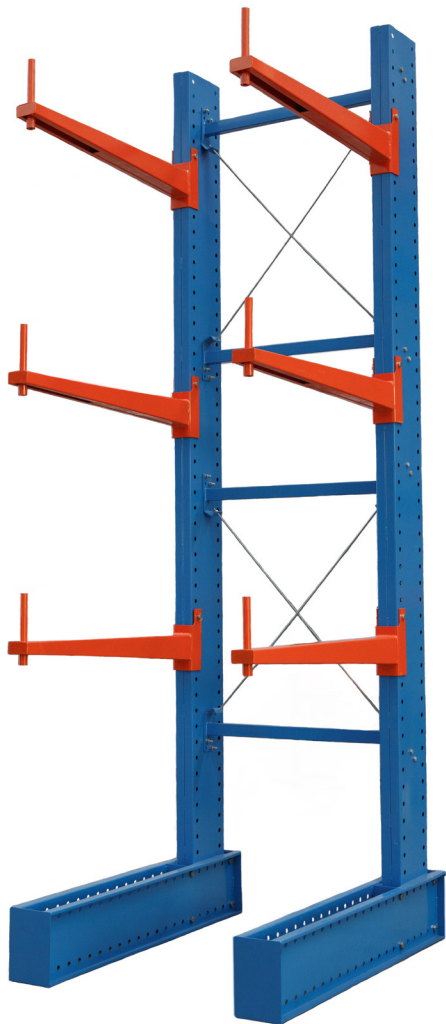

Southward offer a complete range of cantilever racking systems for the storage of long goods. For loads varying from 50 to 2500 kg per cantilever arm and for most types of long goods a storage solution can be provided.

Typical long goods are metal and plastic tubes, wooden boards, hot rolled steel profiles. The Construction of our Cantilever racking is made of hot rolled steel profiles or eye beam profile in various sizes. The standard finish is a high quality epoxy polyester powder coating for inside applications or a hot galvanised coating for outside applications.

Standard Specifications

- Tower: 4200mm High
- Cross Bracing: 1000mm
- Base: 1200mm
- Top Bracing: 1000mm
- Arm: 1200mm

Technical characteristics for Cantilever Racking

- The column and foot are welded or bolted together.
- The cantilever racks can be used single or double sided.
- Column heights of up to 9 meter, perforated every 100mm
- The Cantilever racking is suitable for forklift and crane handling.
- The beams are bolted and adjustable per 100mm, corresponding with the sizes of the stored goods.
- Arm lengths of our Cantilever racking range from 600 to 2500mm.